


SATSON[®] HDM-SPL-2482DS

1x8 HDMI 2.0a Splitter with Built-in & User Adjustable EDID Management



Connection Warranty

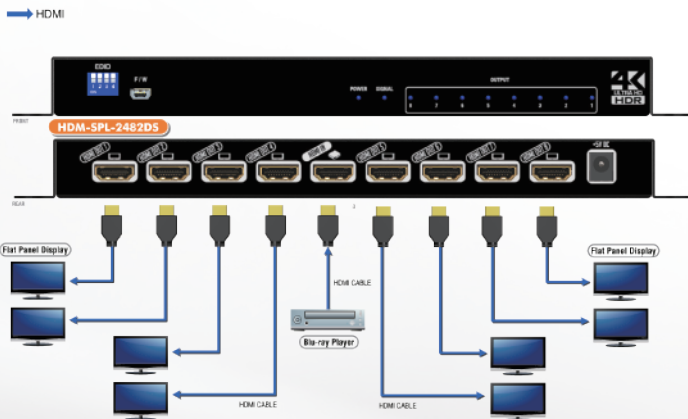

Features

- HDMI 2.0a compliant
- Supports 4K2K@60 4:4:4 8bits
- Supports HDR, which is 4K2K@60 4:2:0 10bits
- HDCP 2.2 and 1.4 compliant
- Wide frequency range: 25MHz~600MHz
- Video bandwidth: 18Gbps
- Supports resolution downscaling from 4K2K to 1080P
- Supports default EDID and EDID learning from display
- Supports xvYCC, x.v.Color & Deep Color
- Mini-USB firmware update for expanding compatibility
- Supports Dolby Digital, DTS-HD and Dolby TrueHD audio
- Easy installation

Package Contents

- 1x HDM-SPL-2482DS
- 1x DC 5V wall wart
- 1x User manual

Specifications

Model Name	HDM-SPL-2482DS	
Technical		
Role of usage		1x8 Distribution Amplifier (Splitter)
HDMI compliance		HDMI 2.0a
HDCP compliance		HDCP 2.2 / 1.4
Video bandwidth		Single-link 600MHz [18Gbps]
Video support		HDR 4K2K@60(4:2:0 10bits) / 4K2K@60 (4:4:4 8bits)
Audio support		DTS-HD Master Audio, Dolby TrueHD Dolby Digital, DTS, DVD-Audio, LPCM, SACD, MPCM
ESD protection		Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge]
Firmware update		Feasible via Mini-USBport
Input		1x HDMI
Output		8x HDMI
HDMI connector		Type A [19-pin female]
Dip switch		EDID Mode selection
Mechanical		
Housing		Metal enclosure
Dimensions [L x W x H]	Model	230 x 67 x 22mm[9" x 2.6" x 0.8"]
	Package	371 x 170 x 77mm[15" x 6.7" x 3"]
	Carton	410 x 368 x 393mm[13" x 14" x 15"]
Weight	Model	230g [8.1 oz]
	Package	773g [1.7 lbs]
Fixedness		Wall-mounting case
Power supply		5V 2A DC
Power consumption		10 Watts [max]
Operation temperature		0~40°C [32~104°F]